



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification<sup>4</sup> :

A47D 5/00, 15/00

A1

(11) International Publication Number:

WO 85/ 01197

(43) International Publication Date:

28 March 1985 (28.03.85)

(21) International Application Number: PCT/GB84/00283

(22) International Filing Date: 16 August 1984 (16.08.84)

(31) Priority Application Numbers: 8324920  
8326407  
8327917(32) Priority Dates: 17 September 1983 (17.09.83)  
3 October 1983 (03.10.83)  
19 October 1983 (19.10.83)

(33) Priority Country: GB

(71) Applicant (for all designated States except US): TRITON EMPRISE TRADING COMPANY, LIMITED [GB/GB]; 24 Queen Street, St Helier, Jersey, Channel Islands (GB).

(71)(72) Applicant and Inventor: EVES, Harold, James [GB/GB]; 78 Fort Picklecombe, Maker, Near Torpoint, Cornwall (GB).

(74) Agent: STEPHENS, Michael, John; M.J. Stephens &amp; Co., 46 Tavistock Place, Plymouth, Devon PL4 8AX (GB).


(81) Designated States: AT (European patent), AU, BE (European patent), CH (European patent), DE (European patent), FR (European patent), GB (European patent), JP, LU (European patent), NL (European patent), SE (European patent), US.

## Published

With international search report.

With amended claims and statement.

(54) Title: BABY CHANGING MAT

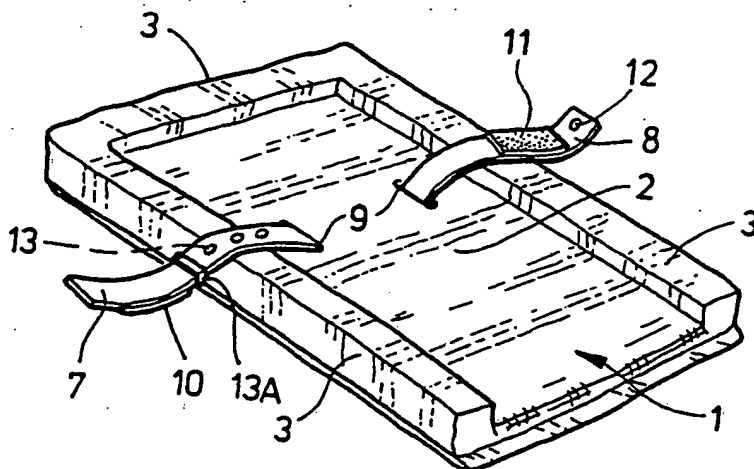

## (57) Abstract

A baby changing mat (1) has releasable restraining straps (7, 8) for holding a baby down on the mat (1) and a transverse stabilising member (6), to which the straps (7, 8) may be anchored, for preventing a baby held by the restraining straps (7, 8) from rolling the mat (1) or itself over sideways. Extra padding (2A) may be provided for the baby's head.

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GA	Gabon	MR	Mauritania
AU	Australia	GB	United Kingdom	MW	Malawi
BB	Barbados	HU	Hungary	NL	Netherlands
BE	Belgium	IT	Italy	NO	Norway
BG	Bulgaria	JP	Japan	RO	Romania
BR	Brazil	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	LI	Liechtenstein	SN	Senegal
CH	Switzerland	LK	Sri Lanka	SU	Soviet Union
CM	Cameroon	LU	Luxembourg	TD	Chad
DE	Germany, Federal Republic of	MC	Monaco	TG	Togo
DK	Denmark	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali		
FR	France				

- 1 -

"Baby Changing Mat"

The present invention relates to a baby changing mat upon which a baby can be placed when being changed.

Known baby changing mats typically comprise a rectangular padded mat providing a central working area which is surrounded on three sides by a padded sill. The mat is generally formed by a flexible plastics material casing filled with a flexible foamed plastics material acting as padding. Due to this construction, the mat has little rigidity but provides a comfortable, easily cleaned, working surface upon which a baby can be laid while being changed.

Of course, a lively baby will not lie meekly on the mat while being changed but will wriggle and twist about. As a result, the person changing the baby generally has to use one hand at least intermittently to restrain the baby. Indeed, unless continually restrained, the baby is quite likely to roll off the mat which could possibly result in injury.

It is an object of the present invention to provide a baby changing mat which overcomes the difficulties, outlined above, that are experienced with known mats.

According to one aspect of the present invention, there is provided a baby changing mat having releasable restraining means which in use of the mat serve to hold the upper part of a baby down upon the mat, and transverse stabilising means substantially preventing a baby held by said restraining means from rolling the mat or itself over sideways. The restraining means also helps to prevent the baby sitting up while it is being changed.

A mat of this form enables a baby to be firmly and safely kept in position while being changed, there



- 2 -

being substantially no risk of the baby wriggling or rolling off the mat or tipping the mat over sideways; in addition, the person changing the baby can freely use both hands.

- 5 In one embodiment, the restraining means are constituted by two straps arranged to pass up around the chest of the baby and to be fastened together by releasable fastening means, for example, constituted by a press stud or studs or cooperating parts of a touch and close fastener. A suitable form of touch and close fastener is one formed by cooperating "Velcro" (Registered Trade Mark) strips. A buckle may alternatively be used.

- 15 In another embodiment the restraining means is constituted by a harness releasably coupled to the mat. With this arrangement the harness can be placed on a baby prior to laying the latter on the mat. Preferably, the harness is releasably coupled to the mat by means of clips arranged to cooperate with anchorages attached to the mat.

- 20 The transverse stabilising means will generally be constituted by means serving to render the mat substantially rigid transversely, at least over part of its longitudinal extent; the transverse stabilising means are thus typically constituted by a substantially rigid transverse member which extends over substantially the whole width of the mat and over part or all of the length of the mat, the baby being protected from the said member by padding. Advantageously, where the restraining means are constituted by straps, the latter are directly or indirectly secured to the said transverse member.



- 3 -

- The restraining means and stabilising means can be provided as an integral part of the mat structure or else as separate items which can be bought as accessories to a basic mat. Thus where the
- 5 restraining and stabilising means are jointly constituted by a substantially rigid member carrying a pair of straps, then either the said member can be incorporated within the mat with the straps extending up through the mat working surface, or both the
- 10 rigid member and the straps can be provided as an accessory with the said member, in use, being placed beneath the mat and the straps threaded through preformed apertures in the mat to extend out of the mat's working surface.
- 15 Advantageously, the undersurface of the mat is provided with non-slip means (such as, for example strips of rubber) to prevent the mat from moving across the surface upon which it rests as a baby twists and wriggles on the mat.
- 20 Mats embodying the invention may be incorporated in other pieces of equipment such as a baby dresser/changing table unit or a portable changing mat/bag. In the former case, the mat is generally provided on the rigid top of the dresser unit, this top surface serving as the
- 25 said transverse stabilising means for the mat.
- The head of a baby, which is particularly vulnerable, may be supported and protected by the provision in the padded central working area of the mat of a region of increased thickness, for example, in
- 30 the form of extra padding, in the part of the mat



- 4 -

on which the baby's head rests in use of the mat. The mat may be provided with pockets for receiving spare baby clothes or nappies; such spare clothes may themselves act as additional padding.

- 5 The mat according to the invention may be designed to be folded upwardly along fold lines on both sides of the transverse stabilising member to form the side walls of a carrier bag when the mat is not in use, releasable fastener means being provided
- 10 for interconnecting the longitudinal side edges of the mat when the latter is so folded, the transverse stabilising member then serving as a base for the bag. The bag thus formed may be used for carrying baby feeding bottles, talcum powder,
- 15 nappies and clothes. In a preferred embodiment of the invention the two restraining straps are each anchored to the substantially rigid transverse member by two press studs or rivets which can act as or secure feet on which the mat may rest when it
- 20 is folded to form a carrier bag.

According to another aspect of the invention there is provided a baby changing mat having releasable restraining means which in use of the mat serve to hold the upper part of a baby down upon the

25 mat.

The invention will now be more particularly described, by way of example, with reference to the accompanying diagrammatic drawings in which:

Figure 1 is a perspective view of a first form of



- 5 -

baby changing mat embodying the invention;

Figure 2 is a view similar to Figure 1 but showing the first form of mat in use with a baby held firmly on the mat by restraining straps with which the mat  
5 is provided;

Figure 3 is a plan view of the Figure 1 mat;

Figure 4 is a cross-section taken on line IV-IV in Figure 1;

Figure 5 is a cross sectional view similar to Figure 4  
10 but showing two separate components of a second form of baby changing mat embodying the invention;

Figures 6 and 7 are respective cross sectional views showing two further variants of the baby changing mat shown in Figure 4;

Figure 8 is a plan view of a baby changing mat according  
15 to another embodiment of the invention, and

Figure 9 is a perspective view of the mat shown in Figure 8, folded up to form a carrier bag.

The same reference numerals are used throughout the drawings to designate the same or corresponding  
20 component parts of the baby changing mats.

The form of baby changing mat shown in Figures 1 to 4 comprises a rectangular padded body generally indicated 1 which provides a central working zone 2 that is surrounded on three sides by a low sill 3.  
25 The padded body 1 takes the form of a waterproof casing 4 of flexible plastics material filled with foam rubber or other suitable padding 5.



- 6 -

The padded body 1 has little inherent rigidity and can be readily deformed from its generally flat condition illustrated in Figure 1. However in the illustrated mat, the padded body 1 is given 5 transverse rigidity by means of a rigid transverse member 6 that extends substantially the whole way across the body 1. The transverse member 6 is interposed between the bottom of the padding 5 and the casing 4 in a longitudinally central 10 region of the mat.

Typical dimensions for the rigid transverse member 6 are as follows:

Length - 400 mm

Width - 50-150 mm

15 Thickness - 3-5 mm

The thickness will, of course, depend on the stiffness of the material used for the member 6, suitable materials being metal, wood and plastics.

Attached to the member 6 are two strong but soft 20 restraining straps 7, 8 made of cloth (for example, towelling), plastics (for example, polypropylene or nylon) or other suitable material. Each strap 7, 8 is approximately 400 mm long and 40-50 mm wide. The straps 7 and 8 extend up through the 25 padding 5 to emerge through apertures 9 in the upper surface of the casing 4.

The position of the member 6 and of the apertures 9 is such that the straps 7 and 8 pass through the casing 4 at locations which would normally be just 30 below the armpits of a baby laid on the mat in the orientation illustrated in Figure 2. These locations are also such that the straps 7 and 8 will pass up





- 7 -

beside a baby laid centrally on the mat either inwardly inclined or slightly outwardly inclined, according to the size of the baby.

The straps 7 and 8 are provided with respective cooperating parts 10 and 11 of a touch and close fastener, these parts 10 and 11 being, for example, constituted by 150 mm lengths of hook and loop VELCRO (Registered Trade Mark) material. A fastener of this form permits the straps 7 and 8 to be releasably fastened together over a range of different positions. Press studs or other suitable fastenings may be used in place of the touch and close fasteners.

In addition to the touch and close fastener part 11, the strap 8 is also provided, at its free end, with one part 12 of a press stud fastener. This part 12 is arranged to engage in any one of three complementary press-stud parts 13 provided on the strap 7 in positions respectively nearer the root of this strap. Alternatively a retaining loop 13A may be provided on the lower strap 7 to hold the end of the upper strap 8.

In use of the baby changing mat of Figures 1 to 4, a baby to be changed is laid on the central working area 2 of the mat and the straps 7 and 8 are pulled gently over the baby's chest and fastened together by means of the touch and close fastener constituted by the cooperating parts 10 and 11. The free end of the uppermost strap 8 is also fastened down by engagement of the press-stud



- 8 -

part 12 in the appropriate one of the complementary press-stud parts 13 provided on the strap 7, or by passing this free end through the retaining loop.

- 5 The upper part of the baby's body is thus held firmly but gently down against the mat by the straps 7 and 8, which resist any attempt by the baby to sit up while it is being changed.

- 10 Furthermore, any attempt of the baby to roll sideways will be thwarted by the stabilising effect of the rigid transverse member 6. The baby is thus firmly and safely held by the mat so that the person changing the baby is free to use both hands.

- 15 A zone 2A of double thickness padding is preferably provided in the region of the baby's head (that is, the top third of the mat) to ensure that the baby cannot harm itself by its efforts to release itself from the straps, or when the baby is lowering  
20 its head onto the mat. Furthermore, as an added stabilising feature, the undersurface of the mat can be provided with non-slip means to prevent it from moving across the surface upon which it rests as the baby moves. Such non-slip means may  
25 comprise, for example, a coating of non-slip material, or suction cups affixed to the underside of the mat.

- The form of baby changing mat shown in Figure 5 is very similar to that of Figures 1 to 4 except that the transverse member 6 and the straps 7  
30 and 8 are made separate from the padded body 1.



- 9 -

To this end, the apertures 9 are extended to open out into the bottom surface of the casing 4 as well as the upper surface of the latter.

Furthermore, the rigid member 6 is not enclosed within the casing 4.

In use of the form of mat shown in Figure 5, the straps 7 and 8 are threaded through the apertures 9 from below until the padded body 1 is seated on the rigid transverse member 6.

10 Thereafter, the mat is used in exactly the same manner as the mat shown in Figures 1 to 4.

One reason for providing the member 6 and straps 7 and 8 in the form of a separate entity to the padded body 1 is that it would enable a basic mat of the Figure 5 form to be purchased and later improved by the addition of the member 6 and straps 7.

Various modifications to the described forms of baby changing mat are, of course, possible. Thus, in addition to the transverse rigid member 6, a longitudinal rigid member could also be provided to prevent the baby sitting up. Alternatively, the member 6 could be arranged to extend not only over the whole width of the mat but also over substantially its full length. Furthermore, the member 6 need not be of sheet form but could be of a frame construction.

The straps 7 and 8 may simply be constituted by opposite ends of a single strap passed through both apertures 9.

30 It is not essential that the straps 7 and 8 be



- 10 -

directly attached to the rigid transverse member 6; thus the straps could be attached to the upper surface of the casing 4 and in this case this upper surface is preferably directly attached to the member 6. One such version of a baby changing mat is shown in Figure 6, in which the two straps 7 and 8 are anchored to the upper surface of the casing 4 by respective rivets or other fastenings 14, 15 which pass through the padded body 1 and are anchored to the transverse stabilising member 6, which may be beneath the mat, as shown, or within the padding 5.

The fastenings 14, 15 may to advantage incorporate releasable press-stud fasteners at the upper surface of the casing 4 by means of which the straps 7, 8 can be releasably attached to the mat. The straps 7, 8 may then be made of soft washable material such as towelling and may easily be detached from the mat for periodic washing.

Where the straps 7 and 8 are not directly attached to the substantially rigid stabilising member 6, the latter need not lie directly beneath the straps 7 and 8. For example, a stabilising member or members could be provided at one or both ends of the mat. In one practical form of such a mat, illustrated in Figure 7, the two straps 7, 8 comprise the opposite ends of a single strip of plastics material welded, stitched or otherwise attached to the upper surface of the casing 4. The two straps 7, 8 could, of course, be attached



- 11 -

separately to the upper surface of the casing.

In theory at least, transverse stabilising means other than a rigid transverse member could be provided such as, for example, very heavy weights  
5 contained in the longitudinally running sills 3. These weights would serve to hold the edges of the mat down thereby preventing the baby turning the mat over sideways. This latter form of transverse stabilising means is not, of course, very practical  
10 and the use of a rigid transverse member is preferred. The transverse stabilising means could alternatively take the form of suitably placed suction cups on the underside of the mat.

The restraining means, instead of comprising  
15 straps 7 and 8, may take the form of a more complicated chest and shoulder harness, but experience has shown that the simple two strap arrangement illustrated in the drawings is wholly adequate. Where a harness is employed then preferably it  
20 can be uncoupled from the mat to facilitate placing of the harness on a baby. Thus, for example, the harness may be provided with clips that are arranged to engage cooperating fixtures provided on the mat; indeed, harnesses of this type are already known  
25 for securing babies in pushchairs and highchairs.

The mat itself may be incorporated in other items of



- 12 -

equipment such as a changing dresser/table unit or a portable changing mat/bag. In the former case, it is known to provide a padded body on the rigid top of a dresser unit; with such an arrangement, there  
5 is no need to provide a separate rigid transverse member 6 since the rigid top to the unit will itself ensure the required transverse stability. The baby changing mat may be incorporated into a baby-carrying frame, in which case the frame itself may  
10 be such as to provide adequate transverse stability during use of the mat.

Figures 8 and 9 illustrate a further embodiment of the invention according to which the baby changing mat, when not in use, can be folded up to form a convenient  
15 carrier bag. The mat has a padded body 1 incorporating, in a central position, a substantially rigid transverse stabilising member 6 of sufficient width to act as a base of a bag formed by upward folding of the body on both sides of the member 6 (Figure 9). The padded sill 3 is  
20 omitted, and the body 1 is formed with transverse fold lines or creases 16, 17 on opposite sides of the stabilising member 6.

The working upper surface of the mat, which becomes the interior surface when the mat is folded up to  
25 form a bag, is afforded by a waterproof plastics sheet material; the lower surface of the mat, which becomes the outer surface of the bag, may be of a substantial hard-wearing fashion material such as a textile or synthetic fabric.

30 Two restraining straps 7, 8 are attached to the



- 13 -

upper surface of the mat, each strap 7, 8 being secured by a respective pair of rivets 14, 15 passing through the body 1 and anchored to the transverse stabilising member 6. The rivets 14, 15 also serve to attach rubber, metal or plastics feet 14A, 15A to the bottom of the mat. The two rivets of each pair 14, 15 are spaced apart in the longitudinal direction so that the feet 14A, 15A lie at the four corners of the rectangular stabilising member 6 and can support the mat stably when it is folded up to form a bag (Figure 9). It will be appreciated that other methods of securing the straps 7, 8 to the mat or to the stabilising member 6 may be employed, as, for example, in the embodiments described previously.

Two releasable fasteners 18, 19, which are shown as sliding clasp fasteners but may be press studs, are provided for interconnecting the longitudinal side edges of the mat when the mat is folded up to form a bag. The fasteners 18, 19 also extend along the top and bottom edges of the mat for closing the bag formed by folding up the mat.

Carrying straps or handles 20, 21 are provided at the opposite ends of the padded body 1 of the mat, so that the two handles 20, 21 come together to facilitate carrying of the mat when it is folded up to form a bag. Alternatively, a single carrying handle 20 may be provided at one end of the mat.



- 14 -

- A pocket 22 is provided in the upper surface of the casing 4, in the lower half of the mat, the pocket being open towards the bottom edge of the mat. The pocket 22, which is formed by a plastics sheet welded or stitched along three edges to the casing 4, is intended to receive clean baby clothes or nappies when the mat is folded up to form a bag, keeping them separate from soiled clothes which can be carried in the main body of the bag. A compartment 23 is formed by stitched or welded seams in the pocket 22 for the purpose of holding a baby's feeding bottle in an upright position when the mat is folded up to form a bag.
- A pair of tabs 24, 25 provided with rings 26, 27 are affixed to the two corners of the mat at one end, for releasably attaching a shoulder strap (not shown) for carrying the bag or for releasably attaching the bag to the handles of a perambulator or push-chair.
- Although the transverse stabilising means, in whatever form provided, are desirable for the reasons explained, they could be omitted from the previously described baby changing mats, the presence of the restraining means itself constituting a significant improvement over prior art mats.





- 15 -

CLAIMS

1. A baby changing mat characterised in that the mat has releasable restraining means (7, 8) which in use of the mat serve to hold a baby down on the mat and transverse stabilising means (6) substantially preventing a baby held by the restraining means from rolling the mat or itself over sideways.
2. A baby changing mat according to Claim 1, characterised in that the restraining means comprise two straps (7, 8) arranged to meet around the chest of a baby and to be fastened together by releasable fastening means (10, 11).
3. A baby changing mat according to Claim 1, characterised in that the restraining means comprise a harness releasably coupled to the mat.
4. A baby changing mat according to Claim 2 or Claim 3, characterised in that the straps or the harness are releasably connected to anchorages attached to the mat.
5. A baby changing mat according to Claim 4, in which the anchorages for the straps (7, 8) or harness are secured to the stabilising means (6).
6. A baby changing mat according to any one of the preceding claims, characterised in that the stabilising means are constituted by means to render the mat substantially rigid transversely, over at least part of its longitudinal extent.



- 16 -

7. A baby changing mat according to Claim 6, characterised in that the stabilising means comprise a substantially rigid transverse member (6) extending over substantially the full width of the mat and over part or all of the length of the mat, the transverse member (6) being incorporated in or located below the mat.
8. A baby changing mat according to Claim 7, characterised in that the restraining means comprise two straps (7, 8) anchored directly or indirectly to the transverse member (6) or to the working surface of the mat (4).
9. A baby changing mat according to Claim 8, characterised in that the restraining straps (7, 8) are anchored to the substantially rigid transverse member (6) by rivets, stitches or other anchoring means passing through the mat to attach the straps to the working surface of the mat.
10. A baby changing mat according to Claim 7 or Claim 8, characterised in that the restraining straps (7, 8) are formed by the ends of a single strip or separate strips welded, stitched or otherwise attached to the working surface of the mat (4).
11. A baby changing mat according to Claim 8, characterised in that the restraining straps (7, 8) are attached directly to the said transverse member (6) and pass through the working surface of the mat.



- 17 -

12. A baby changing mat having releasable restraining means which in use of the mat serve to hold the upper part of a baby down upon the mat.
13. A baby changing mat according to any one of the preceding claims, in which the mat has a padded central working area (2), characterised in that the padded area (2) has a region of increased thickness in the part on which the baby's head rests in use of the mat.
14. A baby changing mat according to any one of the preceding claims, characterised in that the mat is provided on its working surface with at least one pocket (22) for receiving spare baby clothes or nappies.
15. A baby changing mat according to any one of Claims 7 to 11, characterised in that the mat is designed to be folded upwardly along fold lines (16, 17) on both sides of the transverse stabilising member (6) to form the side walls of a carrier bag when the mat is not in use, releasable fastener means (18, 19) being provided for interconnecting the longitudinal side edges of the mat when the latter is so folded, the transverse stabilising member (6) then serving as a base for the bag.
16. A baby changing mat according to Claim 15 when dependent from Claim 8, Claim 9, Claim 10 or Claim 11, characterised in that each of the two restraining straps (7, 8) is anchored to the substantially rigid transverse member (6) by two press studs or rivets (14) spaced apart longitudinally



- 18 -

of the mat, the four studs or rivets serving as or attaching feet (16, 17) on which the mat may rest when it is folded to form a carrier bag.

17. A baby changing mat according to Claim 15 or Claim 16, characterised in that a carrying strap or handle (20) is provided at one or both ends of the mat, facilitating carrying of the latter when folded to form a bag.

18. A baby changing mat according to Claim 15, Claim 16 or Claim 17, including attachments (26, 27) at one end of the mat for releasably attaching a carrying strap or for releasably suspending the mat when the latter is folded up to form a bag.



## AMENDED CLAIMS

[received by the International Bureau on 14 January 1985 (14.01.85);  
original claims 1-18 replaced by amended claims 1-15 (4 pages)]

1. (Amended) A portable baby changing mat comprising a flexible padded body (1) intended to be used on any flat substantially horizontal surface and provided with means for resisting lateral movement of a baby lying on the upper, working surface of the mat, characterised in that:

the mat further comprises a substantially rigid transverse stabilising member (6) incorporated in or located below the mat and extending across the full width of the mat but with a limited extent along the length of the mat, and in that the means for resisting lateral movement of a baby comprise a harness or straps (7, 8) anchored directly or indirectly to the transverse member (6) or to the working surface of the mat and arranged to be secured around the chest of a baby lying on its back on the mat to hold the baby on the mat, so that the baby is prevented from rolling the mat or itself over sideways by the transverse stabilising member (6).

2. (Original Claim 3, amended) A baby changing mat according to Claim 1, characterised in that the harness or straps (7, 8) are releasably connected to anchorages attached to the mat.

3. (Original Claim 5, amended) A baby changing mat according to Claim 2, in which the anchorages for the straps (7, 8) or harness are secured to the stabilising member (6).



4. (original Claim 9, amended) A baby changing mat according to Claim 1, characterised in that the restraining straps (7, 8) are anchored to the transverse member (6) by rivets, stitches or other anchoring means passing through the mat to attach the straps to the working surface of the mat.
5. (Original Claim 10) A baby changing mat according to Claim 1, characterised in that the restraining straps (7, 8) are formed by the ends of a single strip or separate strips welded, stitched or otherwise attached to the working surface of the mat (4).
6. (Original Claim 11) A baby changing mat according to Claim 1, characterised in that the restraining straps (7, 8) are attached directly to the said transverse member (6) and pass through the working surface of the mat.
7. (Original Claim 13) A baby changing mat according to any one of the preceding claims; in which the mat has a padded central working area (2), characterised in that the padded area (2) has a region of increased thickness in the part on which the baby's head rests in use of the mat.
8. (Original Claim 14) A baby changing mat according to any one of the preceding claims, characterised in that the mat is provided on its working surface with at least one pocket (22) for receiving spare baby clothes or nappies.



9. (Original Claim 15) A baby changing mat according to any one of Claims 1 to 6, characterised in that the mat is designed to be folded upwardly along fold lines (16, 17) on both sides of the transverse stabilising member (6) to form the side walls of a carrier bag when the mat is not in use, releasable fastener means (18,19) being provided for interconnecting the longitudinal side edges of the mat when the latter is so folded, the transverse stabilising member (6) then serving as a base for the bag.
10. (Original Claim 16, amended) A baby changing mat according to Claim 9, characterised in that each of the restraining straps (7, 8) is anchored to the substantially rigid transverse member (6) by two press studs or rivets (14) spaced apart longitudinally of the mat, the four studs or rivets serving as or attaching feet (16, 17) on which the mat may rest when it is folded to form a carrier bag.
11. (Original Claim 17) A baby changing mat according to Claim 9 or Claim 10, characterised in that a carrying strap or handle (20) is provided at one or both ends of the mat, facilitating carrying of the latter when folded to form a bag.
12. (Original Claim 18) A baby changing mat according to Claim 9, Claim 10 or Claim 11, including attachments (26, 27) at one end of the mat for releasably attaching a carrying strap or for releasably suspending the mat when the latter is folded up to form a bag.



13. (New) A device for stabilizing a portable baby changing mat, and for holding a baby on the mat, characterised in that the device comprises a substantially rigid transverse

5 stabilising member (6) which is intended to be placed below the mat to extend across the full width of the mat, and a harness or straps (7, 8) anchored to the stabilising member (6), the straps being such that they can be secured around the

10 chest of a baby lying on its back on the mat to hold the baby on the mat, so that the baby is prevented from rolling the mat or itself over sideways by the transverse stabilising member (6) in use of the device.





## STATEMENT UNDER ARTICLE 19





The amendment to Claim 1, and new Claim 13, define the present invention as essentially the novel combination of a transverse stabilising bar and retaining straps or harness associated with or designed to be used with a portable baby changing mat.

By employing a transverse stabilising bar, as opposed to a rigid base for the mat, the mat remains essentially portable and flexible, while retaining sufficient transverse rigidity in the area where the baby is strapped to prevent the baby rolling itself or the mat over sideways. The provision of the transverse stabilising member does not, therefore, preclude folding of the mat longitudinally, as illustrated, for example, in the embodiment of Figures 8 and 9, where the mat folds into a bag.




The amendment of the claims does not necessitate any amendment of the drawings, but the description will require amendment as follows:

"Page 2, line 26 , delete "or all"  
Page 12, lines 1- 11, delete reference  
to changing dresser/table unit  
Page 14, delete paragraph line 20-25"



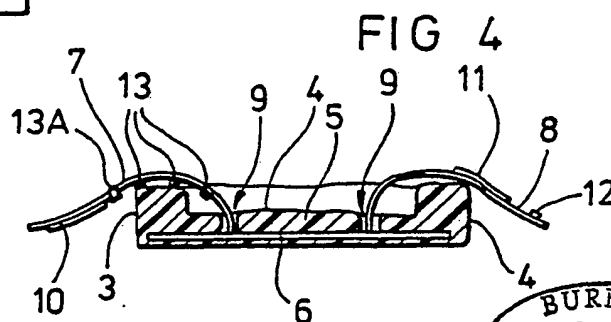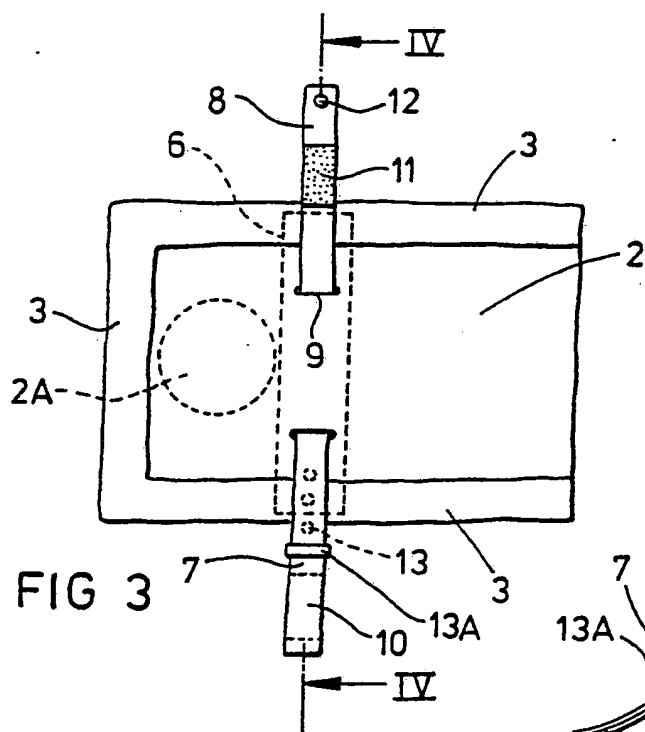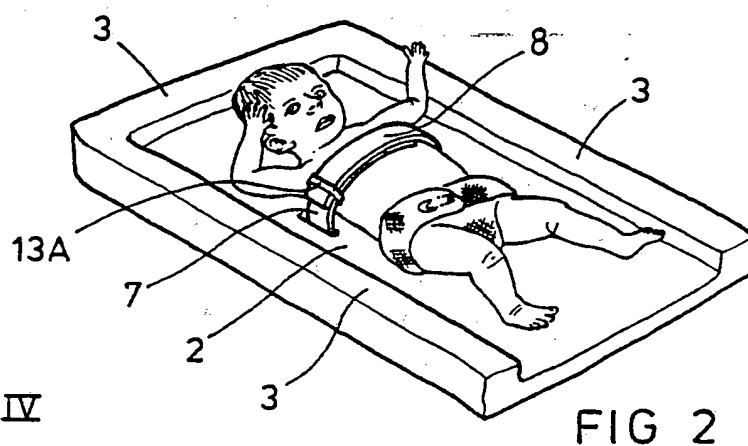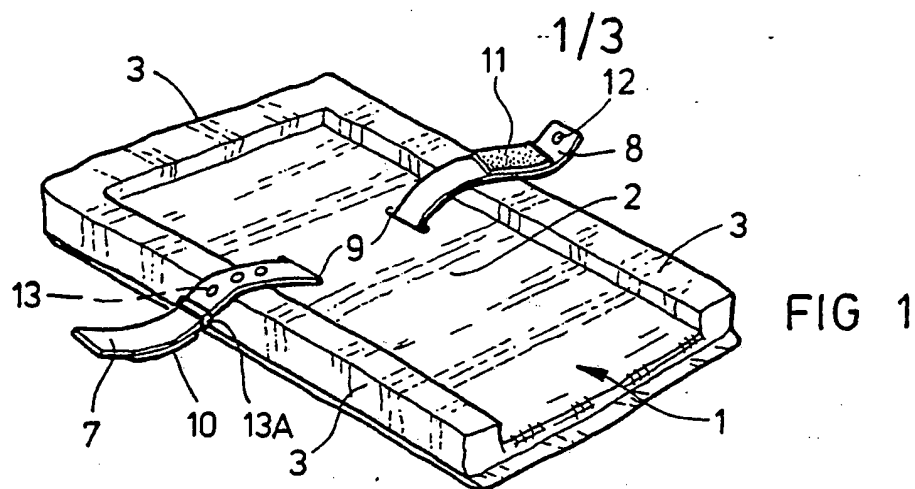

2/3

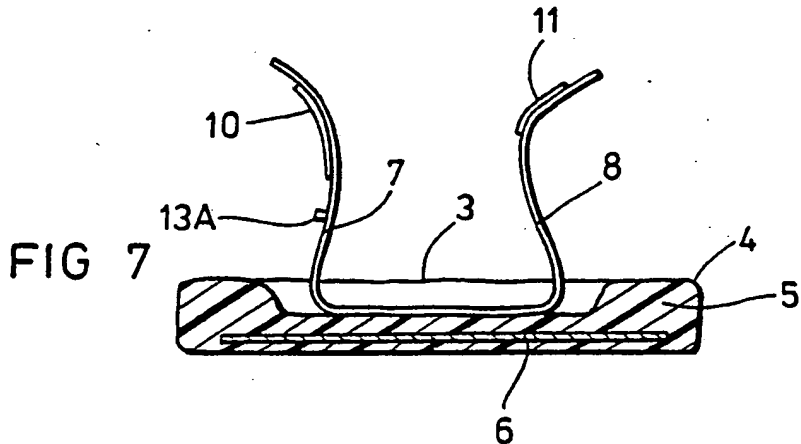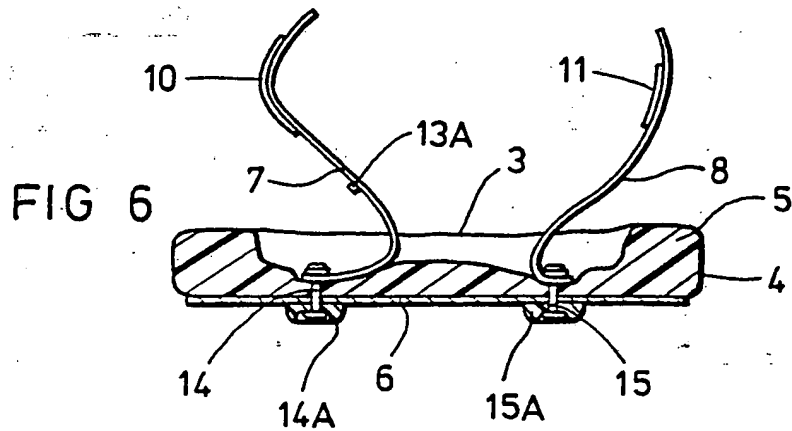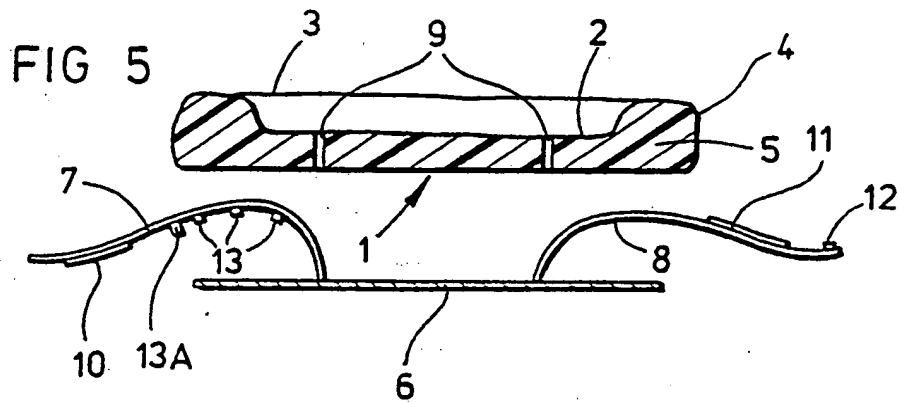

3/3

FIG 8


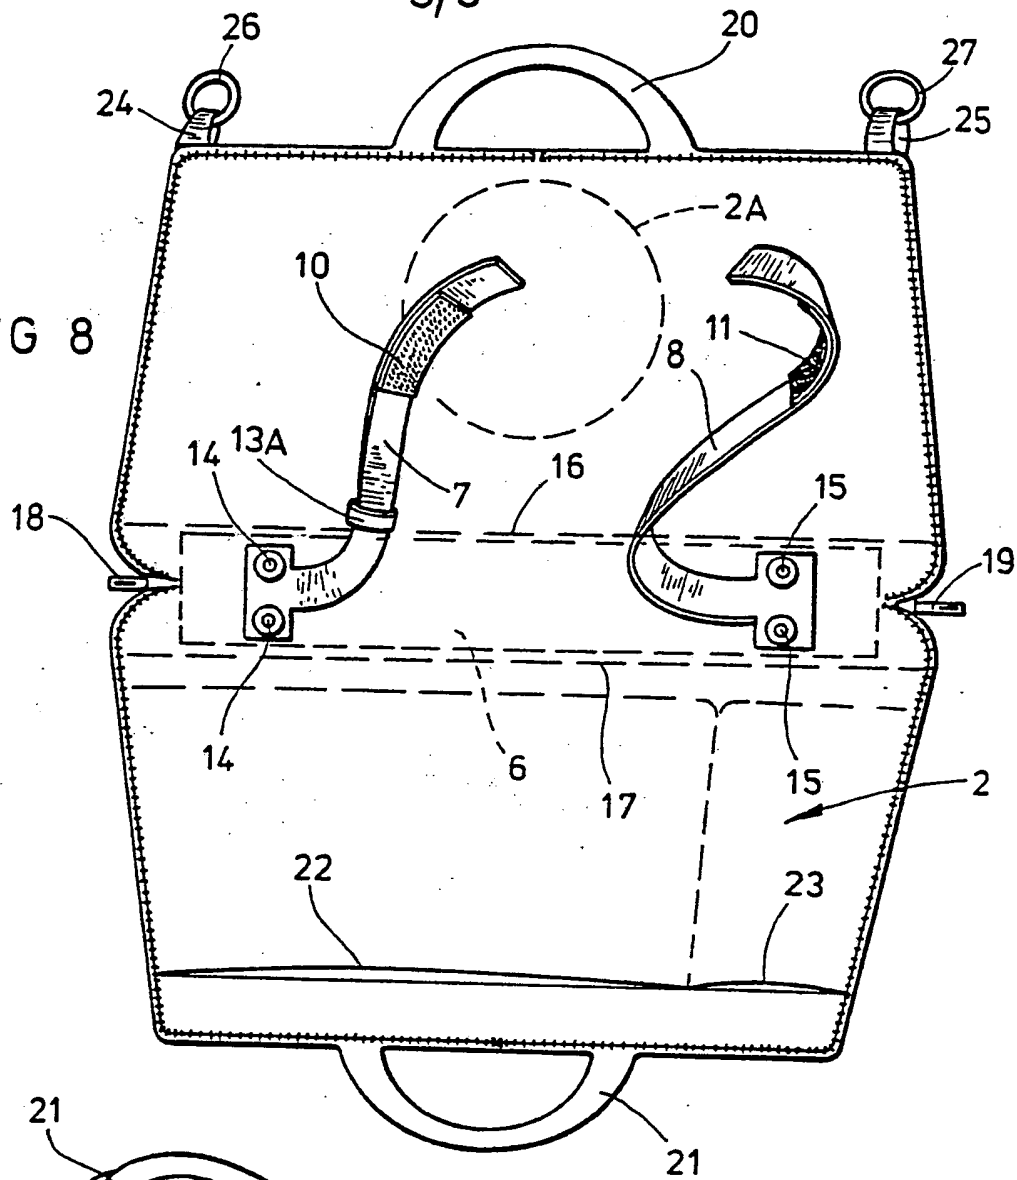


FIG 9



INTERNET

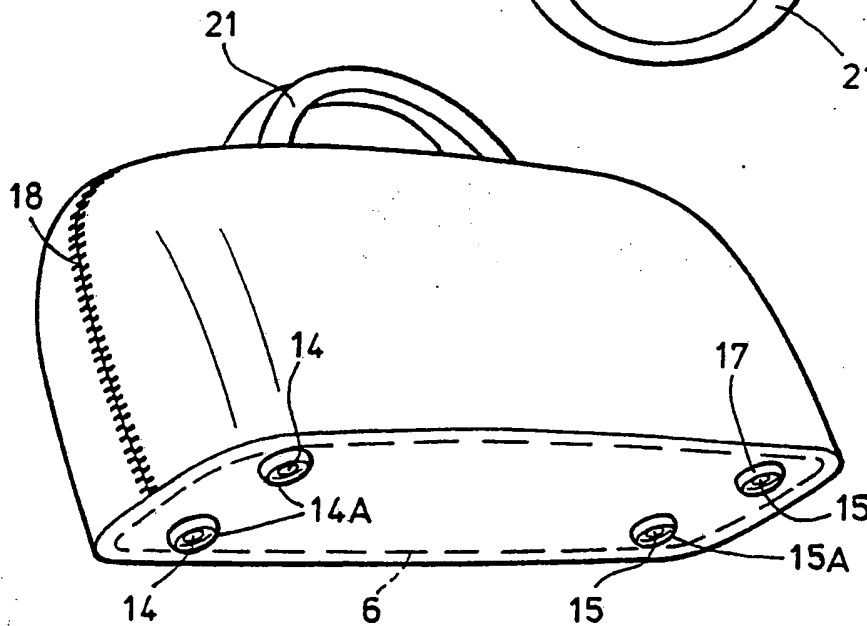

# INTERNATIONAL SEARCH REPORT

International Application No **PCT/GB 84/00283**

## I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) <sup>1</sup>

According to International Patent Classification (IPC) or to both National Classification and IPC

IPC<sup>4</sup> : A 47 D 5/00; A 47 D 15/00

## II. FIELDS SEARCHED

Minimum Documentation Searched <sup>4</sup>

Classification System	Classification Symbols
-----------------------	------------------------

IPC <sup>4</sup>	A 47 D
------------------	--------

Documentation Searched other than Minimum Documentation  
to the Extent that such Documents are Included in the Fields Searched <sup>4</sup>

## III. DOCUMENTS CONSIDERED TO BE RELEVANT <sup>14</sup>

Category <sup>6</sup>	Citation of Document, <sup>15</sup> with indication, where appropriate, of the relevant passages <sup>17</sup>	Relevant to Claim No. <sup>18</sup>
X	US, A, 2846700 (DE PUY) 12 August 1958 see the whole document	1,2,6,7,12, 13
A	--	11
Y	BE, A, 506137 (HUBINONT FRERES SA.) 13 February 1953 see page 2, line 39 - page 3, line 3; figure 1	1,2,4-9,11, 12
Y	US, A, 3999490 (ROCKER) 28 December 1976 see column 4, lines 32-49; figures 3,8	1,2,4-9,11, 12
X	US, A, 4216951 (GRIFFIN) 12 August 1980 see column 2, lines 64-68; figure 1	12
A	--	1,2
X	US, A, 3659297 (SCHUTZ) 2 May 1972 see column 2, lines 45-51; figure 2	12
A	--	1,2,11 ./.

<sup>6</sup> Special categories of cited documents: <sup>18</sup>

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

## IV. CERTIFICATION

Date of the Actual Completion of the International Search <sup>3</sup>

7th November 1984

Date of Mailing of this International Search Report <sup>3</sup>

19 NOV. 1984

International Searching Authority <sup>1</sup>

EUROPEAN PATENT OFFICE

Signature of Authorized Officer <sup>10</sup>

G.L.M. Kruidenberg

## III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)

Category *	Citation of Document, <sup>16</sup> with indication, where appropriate, of the relevant passages <sup>17</sup>	Relevant to Claim No <sup>18</sup>
A	US, A, 3269621 (DISHART) 30 August 1966 see figures 1,2 --	1,2,12-14
A	FR, A, 1502033 (BOUILLOT) 18 November 1967 see page 1, right-hand column, lines 7-15; figure 1 --	1,13
A	DE, A, 2227542 (LINDEN) 20 December 1973 see page 3, line 9 - page 4, line 6; figures 1,2 -----	12,15,17

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON

INTERNATIONAL APPLICATION NO. PCT/GB 84/00283 (SA 7715)

This Annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 12/11/84

The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 2846700		None	
BE-A- 506137		None	
US-A- 3999490	28/12/76	None	
US-A- 4216951	12/08/80	None	
US-A- 3659297	02/05/72	None	
US-A- 3269621		None	
FR-A- 1502033		None	
DE-A- 2227542	20/12/73	None	

For more details about this annex :  
see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)